



World leader in vehicle de-pollution technology



## SEDA TiltingLift 600 N-527511-H



The SEDA TiltingLift 600 is a further development of the SEDA TiltingRamp with a special lifting feature. This system moves the car, not the worker.



### Your benefits:

- ✓ For easy and ergonomic working on car bottom
- ✓ Steplessly variable 90° rotation
- ✓ Available with or without lifting feature (lifting height 600 mm)
- ✓ Hydraulic control system
- ✓ Rugged and robust
- ✓ High quality steel construction

It is easy to place a car into the system. Secured by a hydraulic safety arm on the top, the car is ready to turn 90° in order to help a worker to stand upright and work on the car bottom easily.

Furthermore it is possible to lift the car up to 600 mm.

This unit offers a safe and efficient dismantling of ELVs. Once tried you will never want to work without it!

### Navigation:



### SEDA-Umwelttechnik GmbH

Schwendter Str. 10 / A-6345 Kössen/Tirol/Austria  
UID-Nr.: ATU56621622 / FB-Nr.: FN 231790 v / FB-Gericht: Innsbruck  
Certified company DIN EN ISO 9001

P: +43 5375 6318-0  
F: +43 5375 6318-9  
E: info@seda.at  
Web: www.seda.at




World leader in vehicle  
de-pollution technology




# SEDA TiltingLift 600

N-527511-H

## Dismantling

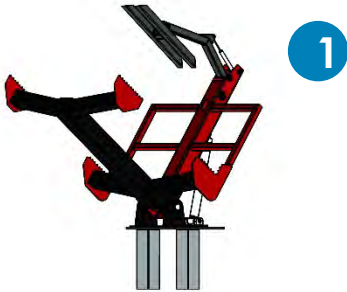

TiltingLift 600 (H-fork)

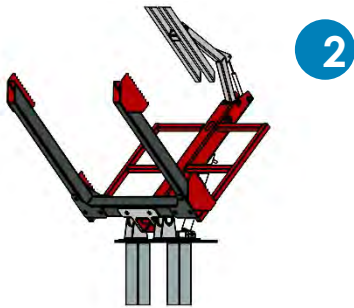

TiltingLift 600 (U-fork)



TiltingRamp (H-fork)



TiltingRamp (U-fork)

Especially for dismantling of engines and transmissions the SEDA TiltingLift 600 is an ideal tool. E.g. if the car is in a titled position you can undo all relevant fixings, lift the car when done and remove the engine in an easy way.

### + Your benefits:

Fast turning in  
15 seconds



Infinitely 90° rotation for ergonomic working on the vehicle floor

Upper fixing arm for more safety

2 fork versions available (H-/U-fork)

4 long strong forks with safety holding system

Top quality steel, professional welded

Powerful hydraulic aggregate

Lifting feature for an easy removing of engines and transmissions

Compact size

#### TECHNICAL DETAILS

Lifting height:	up to 600 mm
Control system:	hydraulic
Loading capacity:	3.500 kg
Engine power:	3 kW
Oil filling quantity:	25 liter
Power supply:	400 V
Dimension TiltingLift:	1.5 x 2.6 x 2.5 m
Required space:	6.0 x 6.0 x 3.5 m

#### ORDER INFORMATION

SEDA TiltingLift 600 (H-fork)	1
N-527511-H	
SEDA TiltingLift 600 (U-fork)	2
N-527511-U	
SEDA TiltingRamp (H-fork)	3
N-527493-H	
SEDA TiltingRamp (U-fork)	4
N-527493-U	



### SEDA-Umwelttechnik GmbH

Schwendter Str. 10 / A-6345 Kössen/Tirol/Austria  
UID-Nr.: ATU56621622 / FB-Nr.: FN 231790 v / FB-Gericht: Innsbruck  
Certified company DIN EN ISO 9001

P: +43 5375 6318-0  
F: +43 5375 6318-9  
E: info@seda.at  
Web: www.seda.at