


**CW** SERIES



## DE-FORESTATION SHEAR PINZA DA DEFORESTAZIONE

**HARDOX®**  
IN MY BODY



ROTATION ON REQUEST

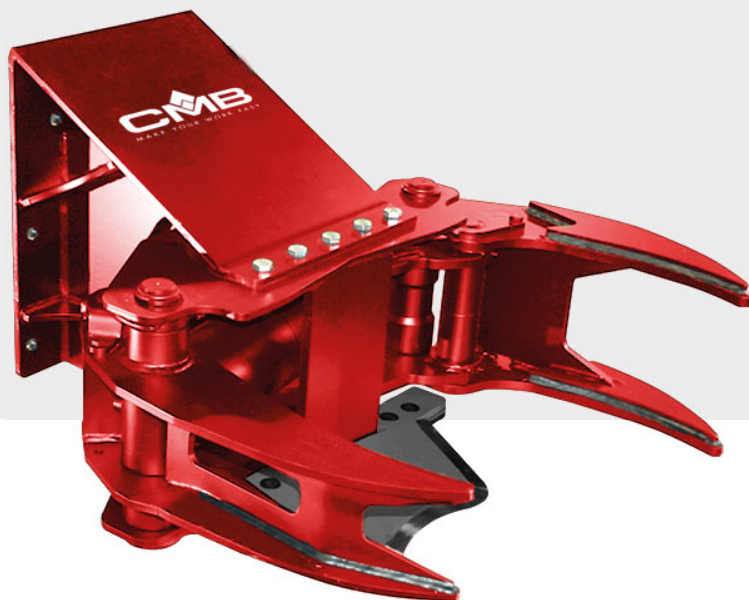



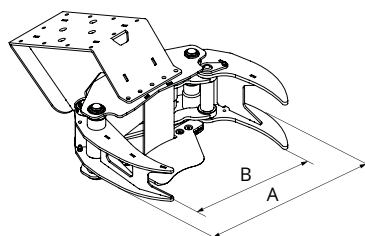



CW SERIES



CW F SERIES



CW SERIES		CW - 200	CW - 200 F	CW - 250	CW - 250 F
 ATTACHMENT WEIGHT	Kg	235	230	255	250
 EXCAVATOR WEIGHT	ton	4 - 9	4 - 9	5 - 11	5 - 11
 SOFT WOOD CUTTING CAPACITY	mm	200	200	250	250
 HARD WOOD CUTTING CAPACITY	mm	130	130	180	180
<b>A</b> OPENING	mm	900	900	900	900
<b>B</b> OPENING	mm	660	660	660	660
<b>C</b> HEIGHT	mm	630	590	630	590
<b>L</b> PULVERIZER LENGHT	mm	770	1000	770	1000
 EXCAVATOR WORKING PRESSURE	bar	230	230	230	230
 EXCAVATOR OIL FLOW	l/min	40	40	50	50

Attachment-excavator couplings data are for information only, always check load diagram of the machine.

➤ **STURDY FRAME**  
TELAIO RINFORZATO

➤ **EASY TO USE**  
COMANDI DI SEMPLICE UTILIZZO

➤ **PRECISE AND CLEAN CUT**  
TAGLIO PRECISO E PULITO

➤ **VERTICAL POSITION PICK UP**  
PRELEVAMENTO IN POSIZIONE VERTICALE

De-forestation shears CW series are suitable for excavators from 5 to 11 ton. Thanks to its compact, reliable and low weight frame CW series allow to cut trees along banks river and edge of fields in total safety.

- > Light frame
- > Reinforced bolted blade
- > Hydraulic rotation (optional)

La pinza da deforestazione serie CW è stata ideata e realizzata per essere applicata su escavatore da 5 a 11 Ton. Grazie alla sua struttura compatta, resistente e al suo peso ridotto, la serie CW, è adatta ad abbattere alberi o cespugli lungo gli argini dei fiumi, a bordo campi, nelle aree forestali.

- > Struttura leggera
- > Fissaggio lama rinforzato
- > Rotazione idraulica (optional)

